

Kooltherm

K10 G2 Soffit Board



Kingspan Kooltherm[®] K10 G2 Soffit Board is a super high performance, fibre-free rigid thermoset phenolic insulation core, sandwiched between an upper tissue-based facing and a lower facing of highly reflective aluminium foil adhesively bonded to the insulation core during manufacture. Kingspan Kooltherm[®] K10 G2 Soffit Board is manufactured without the use of CFCs/HCFCs and has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

Kooltherm[®] K10 G2 Soffit Board is suitable for:


- *Roof Insulation- Flat concrete Roof*
- *Floor Insulation- Concrete Floor Soffit*



FRULSIDER FM-ISO MAX Insulation Nails



- **Fixing with steel nail for all thermal insulation applications**
Concrete, solid brick, honeycomb brick, cell like clay brick, lightweight honeycomb brick, hollow dense aggregate block, hollow light aggregate block, aerated concrete and solid stone. **Not suitable for fire rated applications**

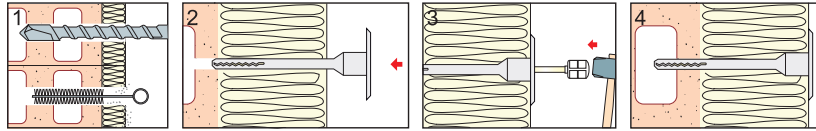

ETA-08/0094
European Technical
Approval



Part No.	Description	mm	mm	mm	mm	qty
FM-ISOMAX08100 (6192500810000)	8 x 100mm Thermal insulation system	8	55	25-45	60	200
FM-ISOMAX08120 (6192500812000)	8 x 120mm Thermal insulation system	8	55	45-65	60	200
FM-ISOMAX08140 (6192500814000)	8 x 140mm Thermal insulation system	8	55	65-85	60	200


Note: Suitable for applications exposed to external wind pressures, in such applications additional fixings may be required, this should be assessed by a design professional responsible for the application in accordance with the appropriate Australian wind load standards.

Performance in Concrete 15-50MPa

	Min.Spacing (mm)	Min. Edge (mm)	Recommended Resistance (Tensile)
FM-ISOMAX Insulation Fasteners - all sizes	100	100	0.13 kN (13kg)

1. For cut or modified panels it is recommended a minimum of 4 fixings per m²


2. Recommended Resistance is calculated from the characteristic ultimate load with safety factor greater than > 3

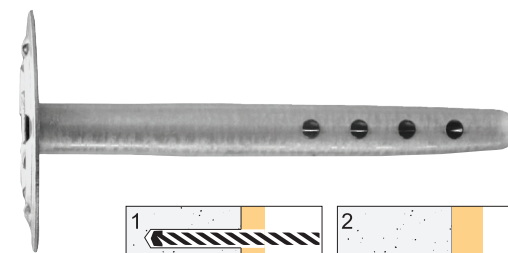

TOGE TID METAL Insulation Nail

- **Galvanised insulation panel fixing**

Concrete, solid brick, aerated concrete and solid stone.

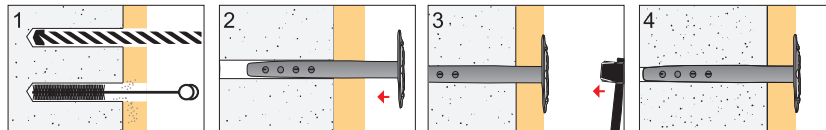

Certified
Fire Resistance



Part No.	Description	mm	mm	mm	mm	qty
TIDSMETAL08080 (031 061 080)	8 x 80mm Metallic insulation panel fixing	8	40	20-40	35	250
TIDSMETAL08110 (031 061 110)	8 x 110mm Metallic insulation panel fixing	8	40	50-70	35	250
TIDSMETAL08140 (031 061 140)	8 x 140mm Metallic insulation panel fixing	8	40	75-100	35	250

Note: Suitable for applications exposed to external wind pressures, in such applications additional fixings may be required, this should be assessed by a design professional responsible for the application in accordance with the appropriate Australian wind load standards.

Please refer to insulation manufacturer instructions for fastener suitability.


Suitable for fire rated applications, product should be reviewed and approved by a design professional responsible for the application prior to use.

Performance in Concrete 15-50MPa

	Min.Spacing (mm)	Min. Edge (mm)	Recommended Resistance (Tensile)
FM-ISOMETAL Insulation Fasteners - all sizes	100	100	0.28 kN (28kg)

1. For cut or modified panels it is recommended a minimum of 4 fixings per m²

2. Recommended Resistance is calculated from the characteristic ultimate load with safety factor greater than ≥ 4

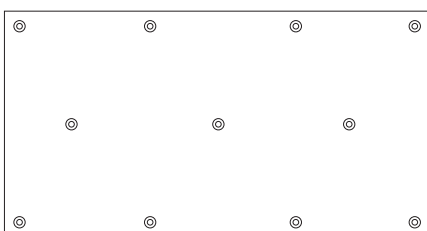

Kingspan Kooltherm® K10 G2 Soffit Board should be fully restrained to a concrete soffit by the use of minimum 11 No. approved insulation fasteners with a minimum head diameter of 35 mm.

1. The fasteners should be evenly distributed over the whole area of the board and must offer a minimum embedment equal to or greater than the specified fixing embedment into the concrete substrate. Alternatively, a designer can calculate the required design strength to identify a suitable embedment for the design loading.
2. The fixing layout should include 4 fasteners along each length, no less than 50 mm and no more than 150 mm from edge of board. 3 fasteners are also required through the middle (offset from edge positions as per diagram).
3. Where the board may be subject to external wind pressure, the requirement for additional fixings should be assessed by a design professional responsible for the application in accordance with appropriate Australian wind load standards.
4. Careful selection of fixings should be given to ensure they are appropriate for the application, „base material, environmental exposure and applicable fire ratings. For further assistance please contact ICCONS or the responsible design engineer.



ANCHORING



ADHESIVES



**CONCRETE
NAILING
SYSTEMS**



SCREWS



SCREWS



DRILLING



DIAMOND



TOOLS

ICCONS®

ICCONS® VIC Head Office:

383 Frankston - Dandenong Rd
Dandenong South, Vic, 3175
P: 03 9706 4344
F: 03 9768 3329

New South Wales

Unit A, 17 Seddon Street
Bankstown, NSW, 2200,
P: 02 9791 6869
F: 02 9790 8404

Queensland

42-44 Nealdon Drive,
Meadowbrook, QLD 4131
P: 07 3200 6455
F: 07 3299 7548

South Australia

29-31 Weaver Street.
Edwardstown, S.A, 5039
P: 08 8234 5535
F: 08 8354 4689

Western Australia

90 Christable Way,
Landsdale, W.A, 6065
P: 08 6305 0008
F: 08 6305 0011

Northern Territory

U1 / 14 Menmuir Street
Winnellie, N.T, 0820
P: 08 8947 2758
F: 08 8947 2758

New Zealand

5E Piermark Drive,
Rosedale, Albany, 0632
New Zealand.
P: +64 09 415 8564.

Thailand

55 Phetkasem 62/3,
Bangkhae, Bangkok 0160
P: + 66 2 801 0764
F: + 66 2 801 0764



NATIONAL CODE COMPLIANT

www.iccons.com.au